

Fig-1

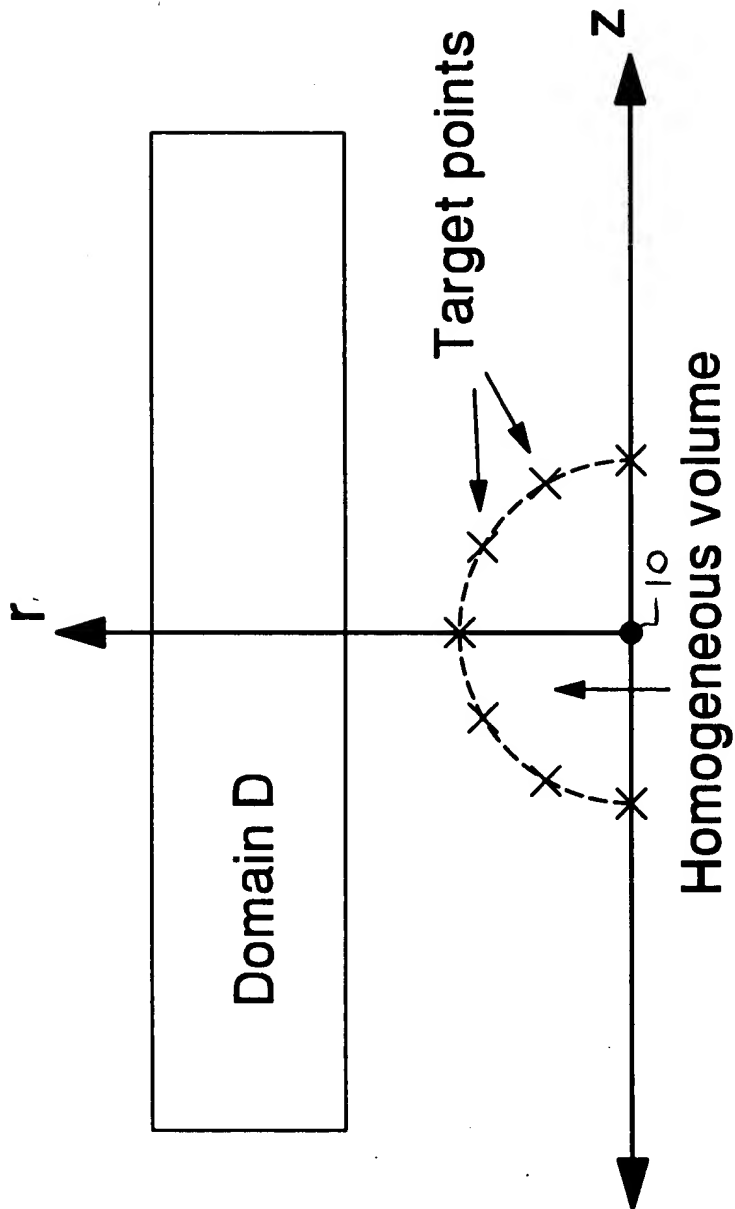


FIG. 1

Fig. 2

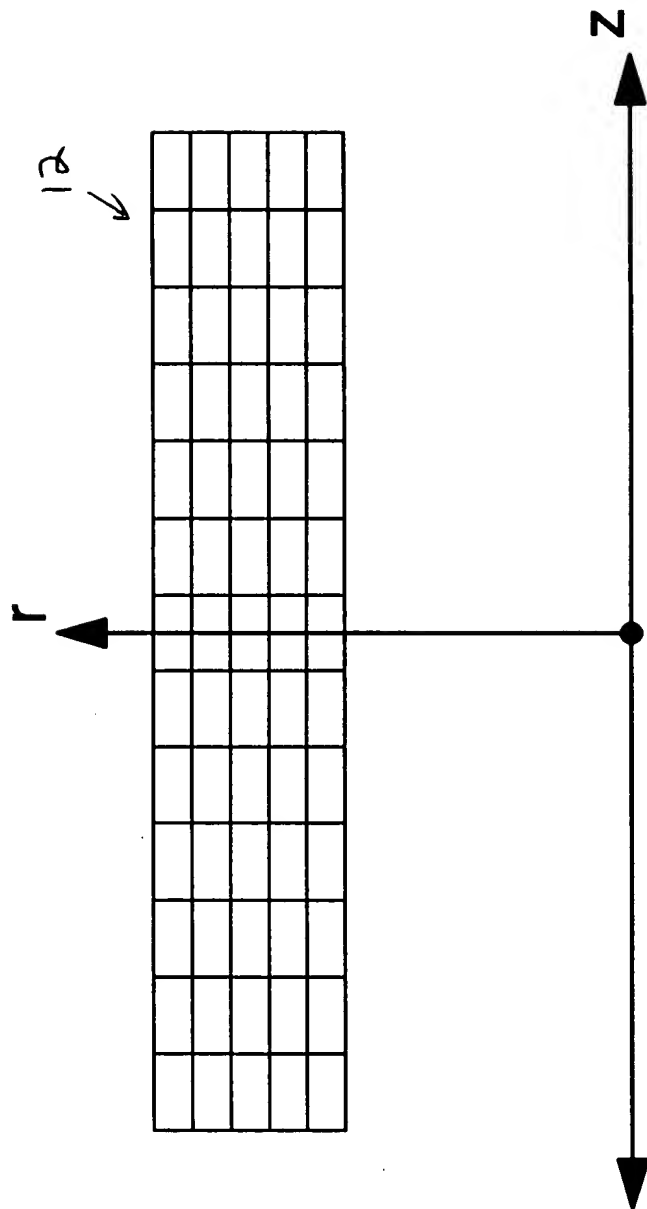


FIG. 2

[illegible]

Fig-3b

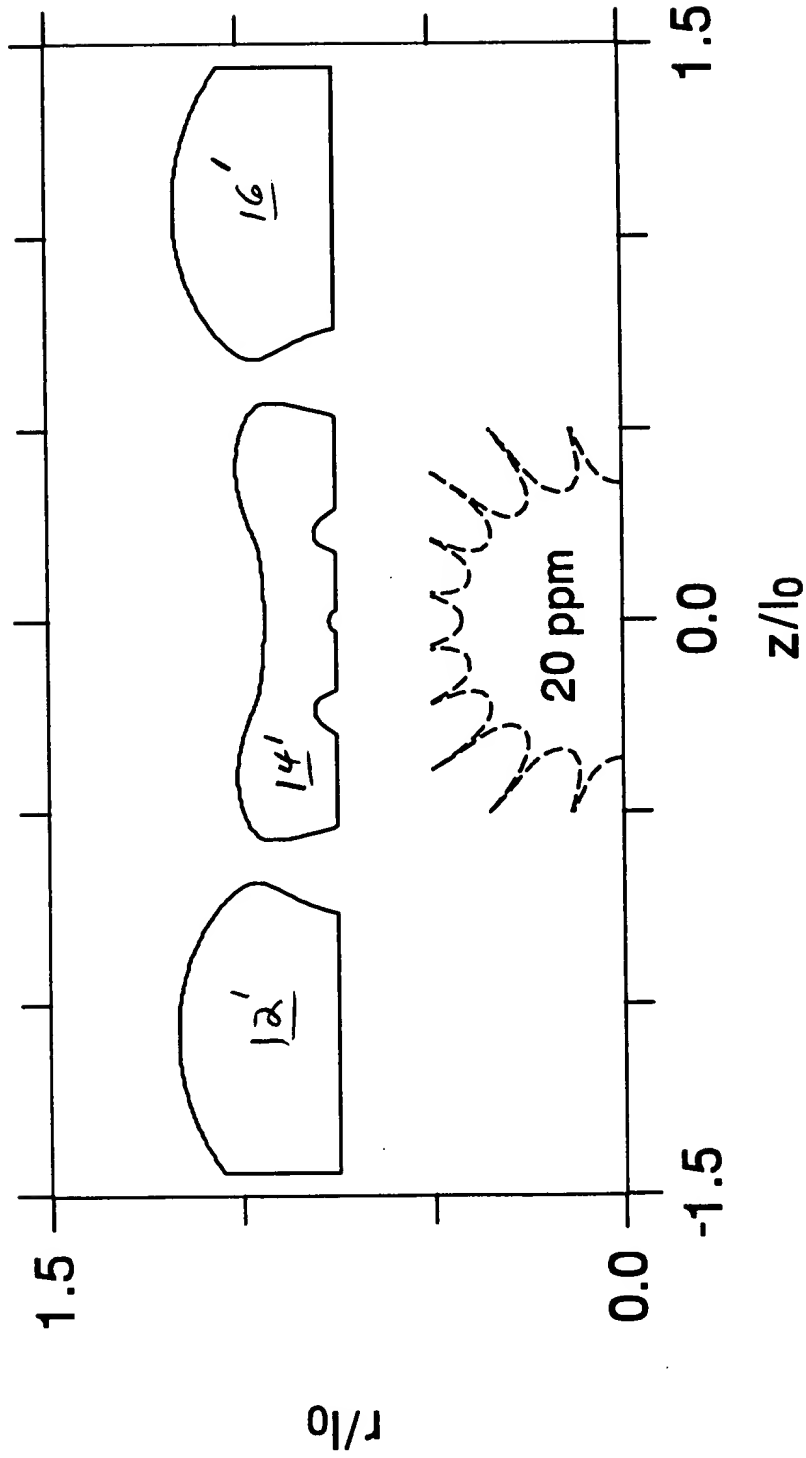


FIG. 3b

Fig. 4a

SECRET

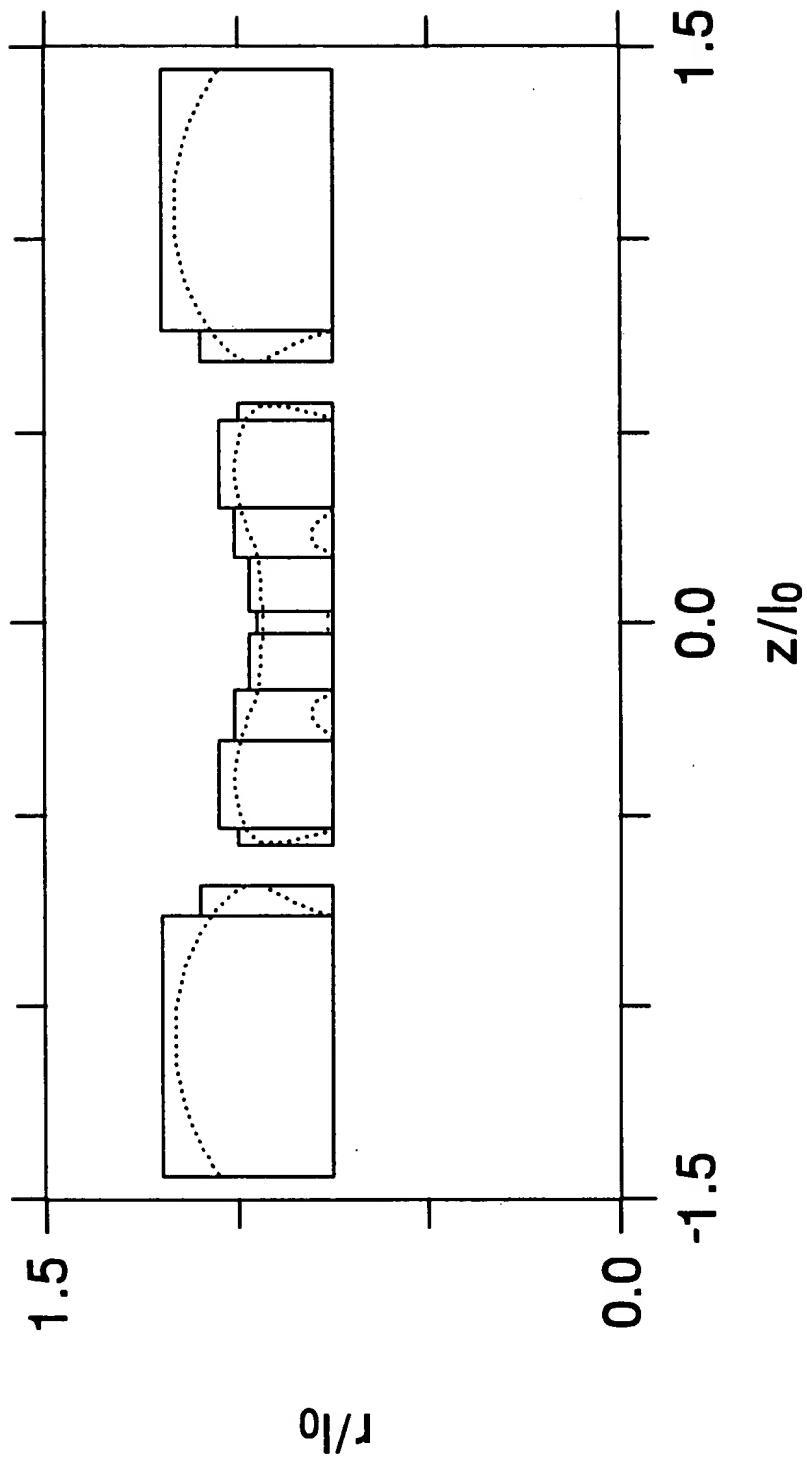


FIG. 4a

Fig. 4b

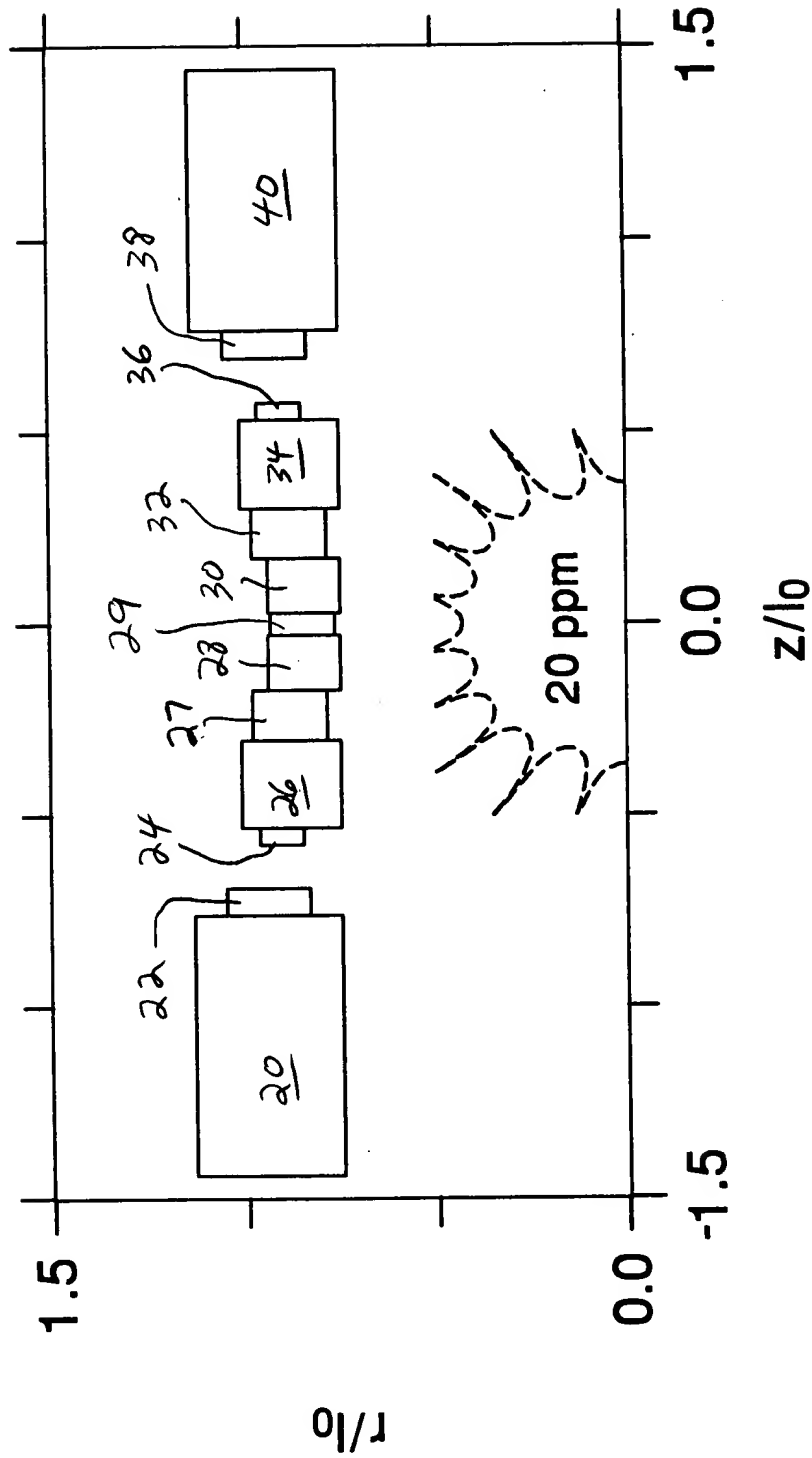


Fig. 4b

Fig. 5a

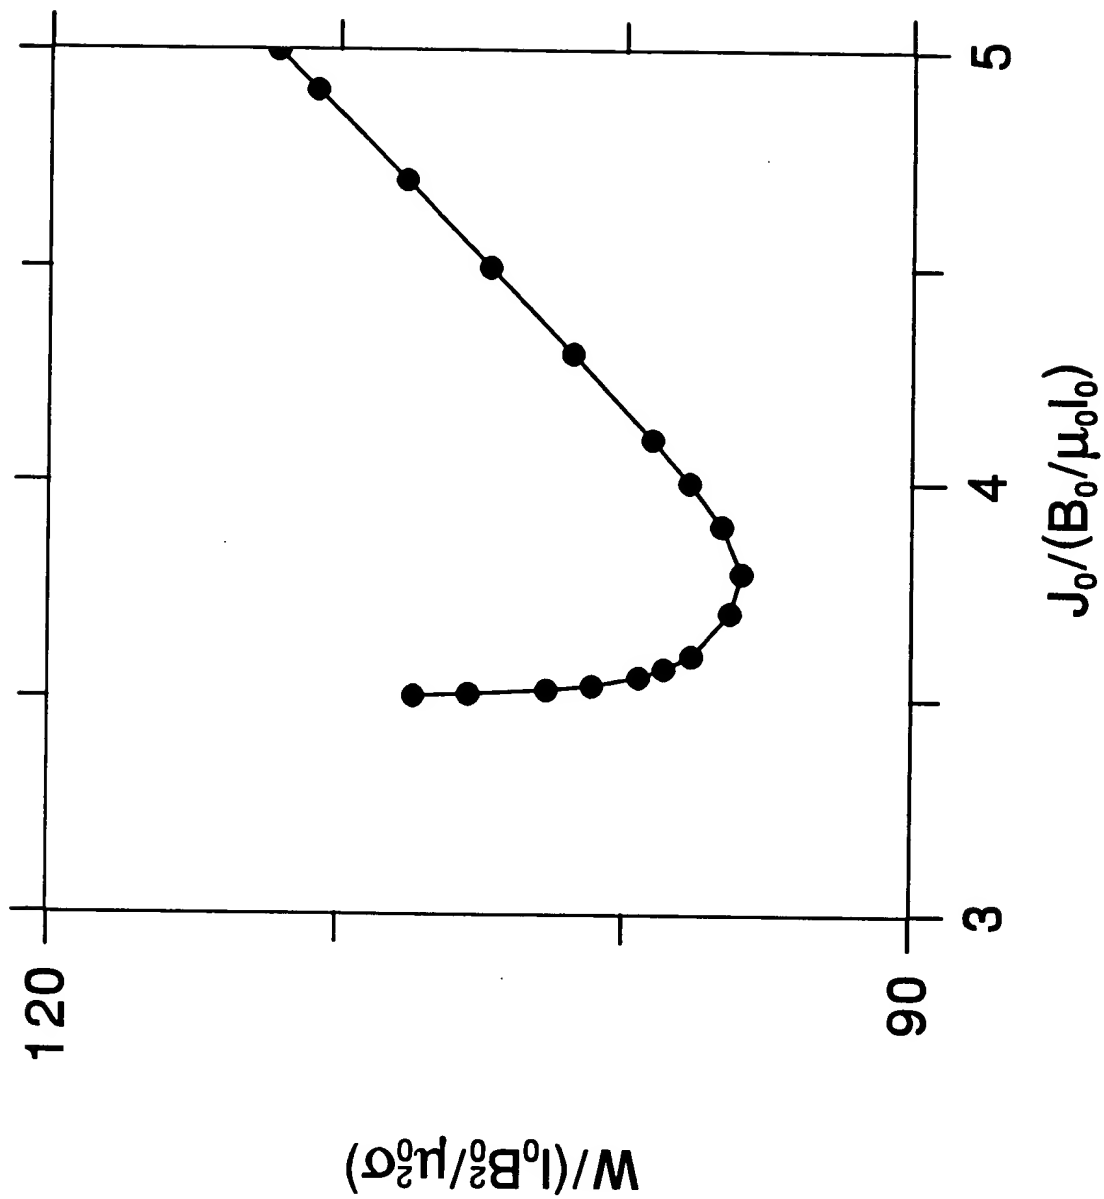


Fig. 5a

[illegible]

Fig. 5b.

Fig. 6

Fig. 6. The dependence of the current density J_0 on the voltage V for the sample with the thickness $d = 0.5 \text{ cm}$. The temperature $T = 300 \text{ K}$. The current density J_0 is in A/cm^2 and the voltage V is in mV .

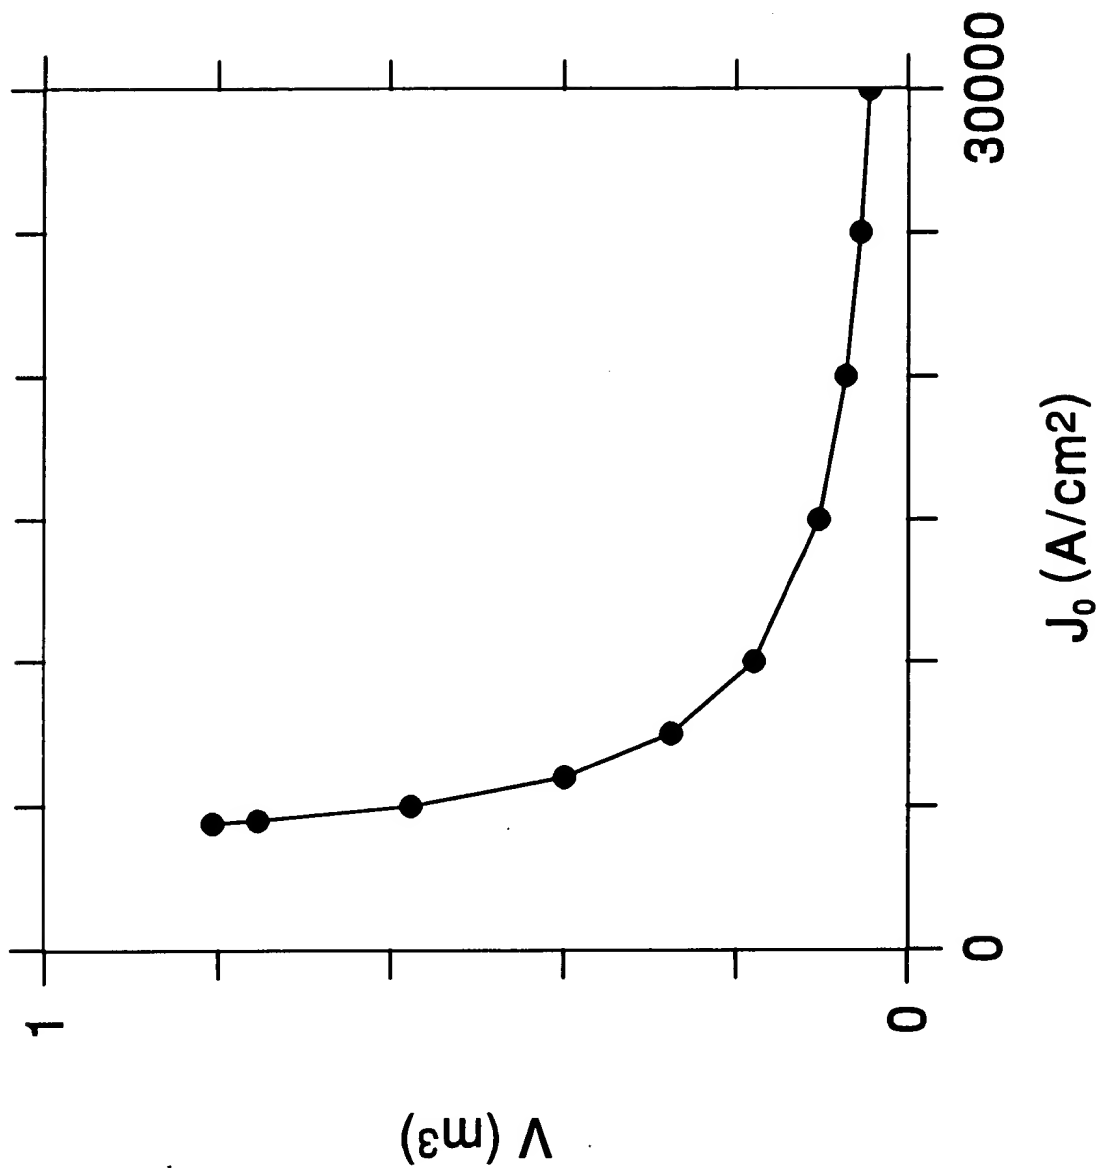


Fig. 6

Fig-7a

Copyright © 1998 by International Business Machines Corporation. All rights reserved. This document is the property of International Business Machines Corporation. It is loaned to your organization under license from International Business Machines Corporation. It is not to be distributed outside your organization. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without prior written permission from International Business Machines Corporation.

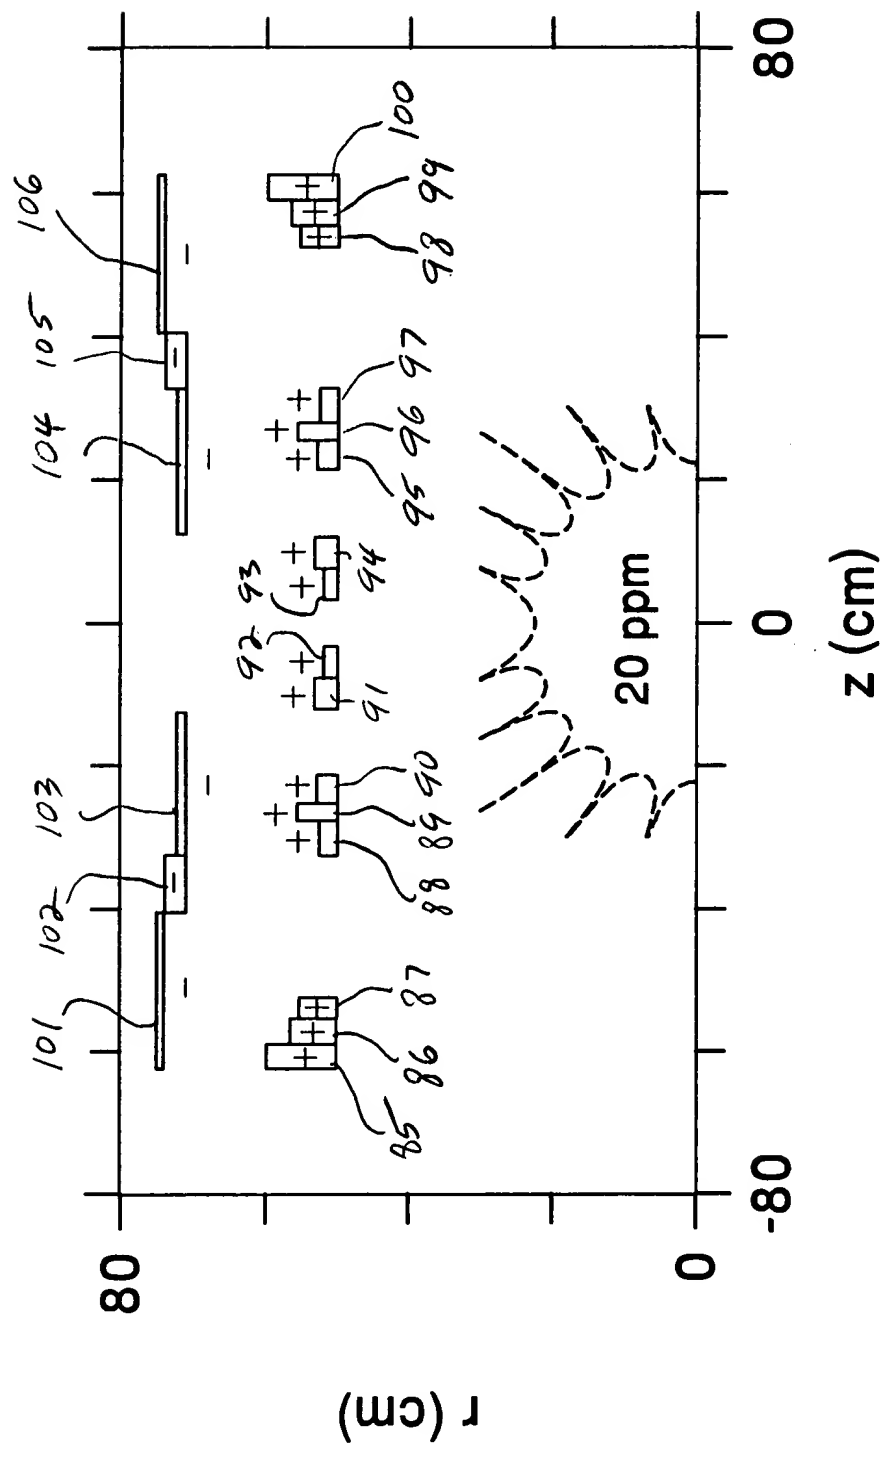


FIG. 7a

Fig. 7b

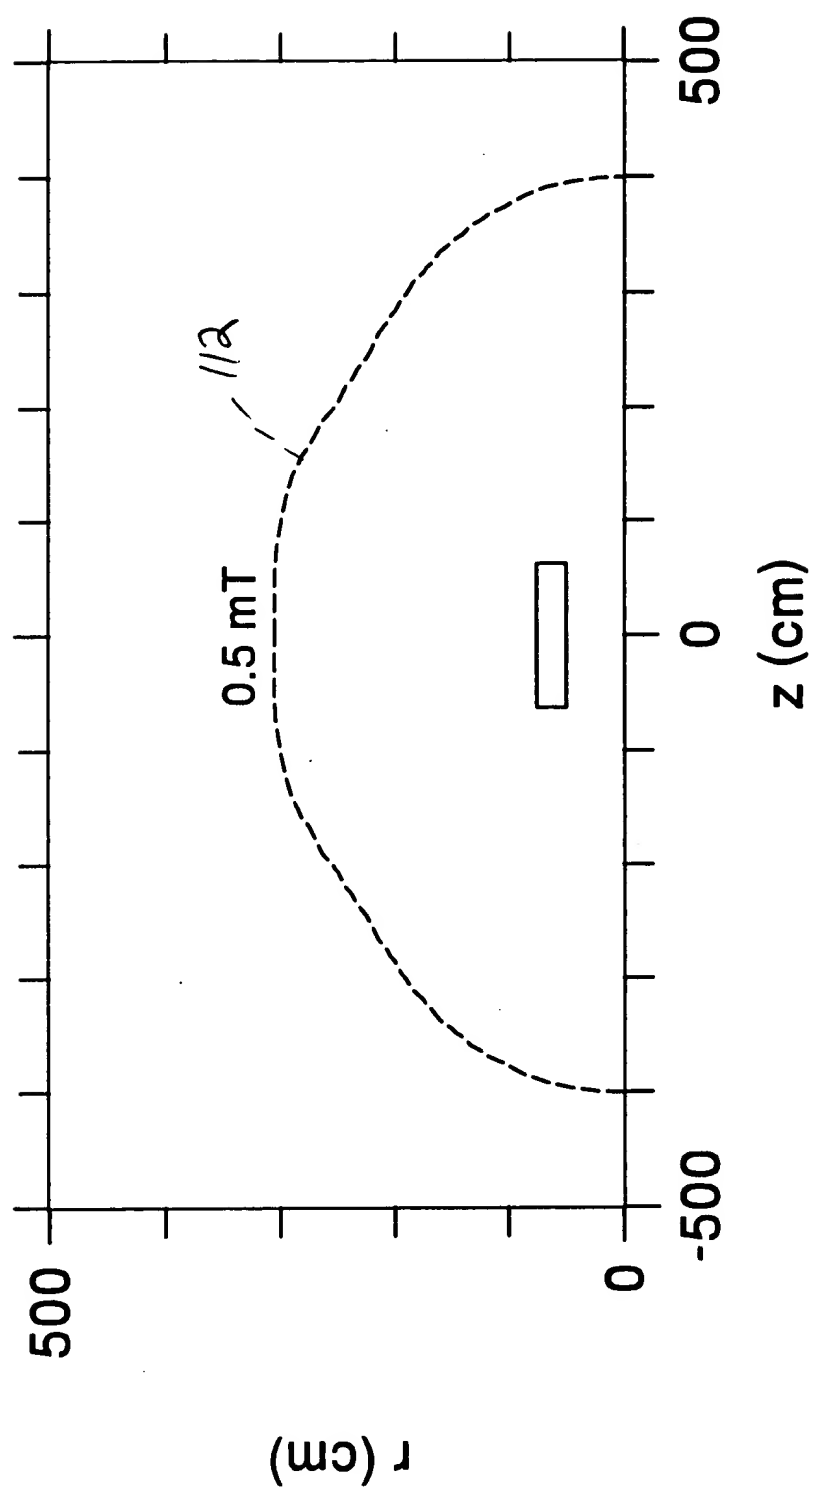


FIG. 7b